

# GEMTOR™

... when your life is on the line™

## Spec Sheet

### SP1101LYZ6 – 100% tie-off Soft-Pack Energy Absorber

#### Energy Absorber Pack Webbing:

1 3/4" wide 6000 lb. fade resistant Polyester  
1 3/4" wide special formulated tear webbing

#### Lanyard:

Two x 1" wide 9000 lbs. polyester web

#### Length:

Standard length 6', other lengths available

#### Connectors:

Model # 3155 locking snaphook for harness connection, two #3100 locking snaphooks with 2" gate opening on anchorage ends

#### Other Available Connectors\*:

3129, 3154, 5105, 5107, 5155, 5710, 5741, 5742

#### Soft-Pack Color:

Red

#### Lanyard Color:

Yellow


#### Standard Compliance:

OSHA, ANSI A10.32, CSA Z259.1. Meets ANSI Z359.1-2007 when supplied with #5155 in place of #3155 on harness end (SP1101NYZ6). Applies to standard and optional connectors. All lanyards with 3100, 3129, 3131, 5105, 5107 & 5155 meet ANSI Z359.1-2007 standard (3600 lbs. connector gate strength).

#### Special Features & Selling Points:

100% tie-off, solid connection between lanyard legs, reduces the possibility of serious injury by limiting the forces to less than 900 lbs., clear protective covering for easy visual inspection, high visibility, durable, economical, easy to use.

\* The end of the energy absorber that connects to the harness can only be supplied with a Model # 3154, # 3155 or # 5155 snaphook, or a Model # 5105 or Model # 5107 carabiner.

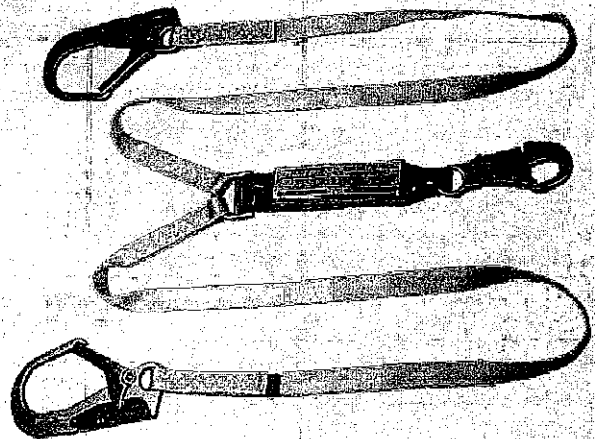

Rev. 10/11



Gemtor, Inc. • One Johnson Avenue • Matawan, NJ 07747  
Phone: 732-583-6200 • 800-405-9048 • Fax: 732-290-9391  
Web: [www.gemtor.com](http://www.gemtor.com) • Email: [sales.info@gemtor.com](mailto:sales.info@gemtor.com)

